

Cold Shrinkable Cable Termination (0.6/1 kV)

Product Descriptions

- Be made of imported liquid silicone rubber.
- Be divided into 3 cores, 4 cores, 5 cores.
- Be widely used in the terminal treatment.
- With features of waterproof, moisture proof, excellent capability and easy installation.
- Cable shield type: tape/wire.

Functional Test


AC voltage (5 mins) 8 kV

AC voltage (wet, 1 min) 7.2 kV

Heating cycles voltage test
(95~100°C, 1 cycle shall be of 8h,
total 60 cycles) No breakdown nor
flashover

Sizing Table

Specification	Applicable cable cross-section(mm ²)
Cold shrinkable termination -3 cores	
TLS-3-0.6/1-25~50	25~50
TLS-3-0.6/1-70~120	70~120
TLS-3-0.6/1-150~240	150~240
TLS-3-0.6/1-300~400	300~400

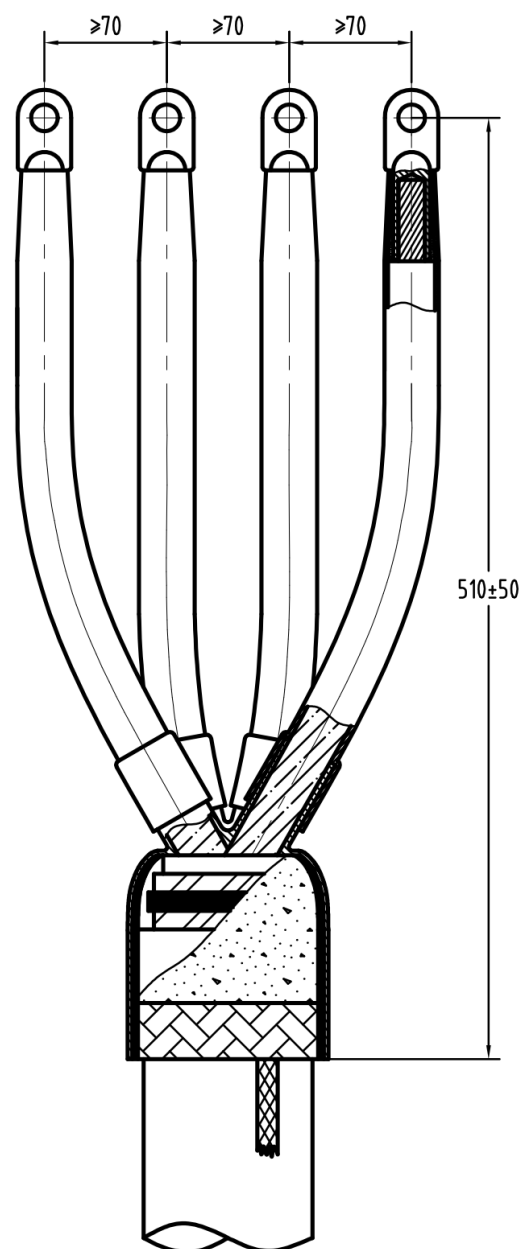

Sizing Table

Specification	Applicable cable cross-section(mm ²)
Heat shrinkable termination -4 cores	
TLS-4-0.6/1-25~50	25~50
TLS-4-0.6/1-70~120	70~120
TLS-4-0.6/1-150~240	150~240
TLS-4-0.6/1-300~400	300~400
Heat shrinkable termination -5 cores	
TLS-5-0.6/1-25~50	25~50
TLS-5-0.6/1-70~120	70~120
TLS-5-0.6/1-150~240	150~240
TLS-5-0.6/1-300~400	300~400